
Flat Panel Cart Assembly Guide

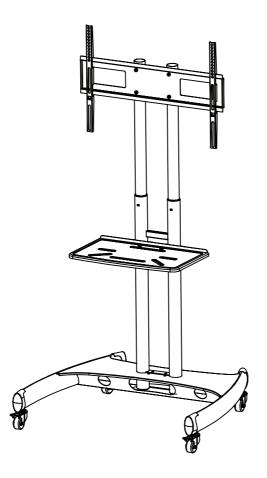

Adjustable Height Flat Panel TV Cart with Media Shelf Designed for 32"-65" TV Panels VESA: 100 x 100 - 600 x 400 Max Load Capacity: 100 lbs Media Shelf Max Load: 10 lbs

Table of Contents

| Table of Contents and Warnings | 2 |
|-------------------------------------|----|
| Part List | 3 |
| Assembly and Installation | |
| 1. Installing the Casters and Poles | 4 |
| 2. Adjusting the Pole Height | 5 |
| 3. Installing the Media Shelf | 6 |
| 4. Installing the TV Mount | 7 |
| 5. Selecting the VESA pattern | 8 |
| 6. Attaching the TV to the Cart | 9 |
| 7. Cable Management | 10 |

Tools Required

Phillips Screwdriver Tape Measure Wrench



WARNING!

Severe personal injury and property damage can result from improper installation. Read instructions carefully before beginning.

Assistance is required when installing the TV.

If you do not understand the instructions or have any concerns please contact a qualified local installer.

Do not install or assemble if the product or hardware is damaged or missing, if you require replacement parts, contact your local dealer.


☑This product fits most 40" - 60" flat panel displays; maximum eight for the disply is 100 lbs.
☑Do not use this product for anything other than what it was originally designed.

This product contains moving parts, please use caution.


The manufacturer disclaims any liability for the modifications, improper installation, and installation exceeding maxium weight capacity. The manufacturer will not be liable for any damages arising out of the use of, or inability to use the product.

Visual Guides


| Q | Q | Ð | | + | | 70 |
|---------|--------|-------------------------|-----------------|------------|---------|------------|
| Tighten | Loosen | Phillips Screwdriver | Tape Measure | Adjustment | By Hand | Hex Wrench |

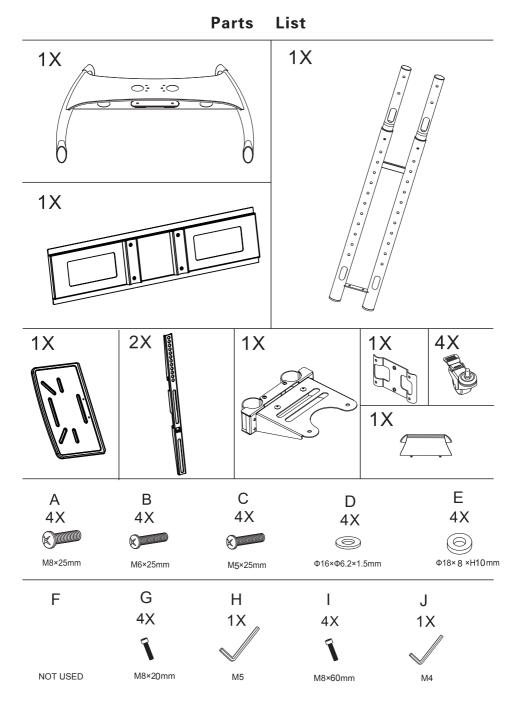

1.1 Install casters to base

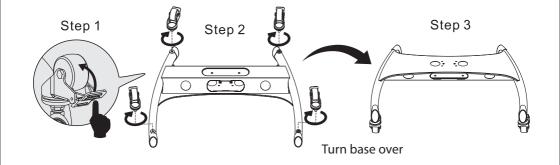


1.2 Install poles to base

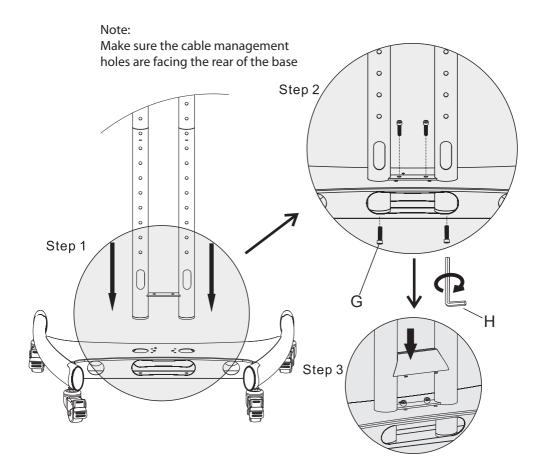

2. Adjust the height of the telescopic mounting poles


Step 1. Using your thumb or finger, depress the right upper pole spring plunger ball located at the cable window, and twist the upper pole 90 degrees. Pull the upper pole to your desired height, twist the upper pole toward the plunger holes, and engage the spring ball into the plunger hole and set as shown in Figure 1.

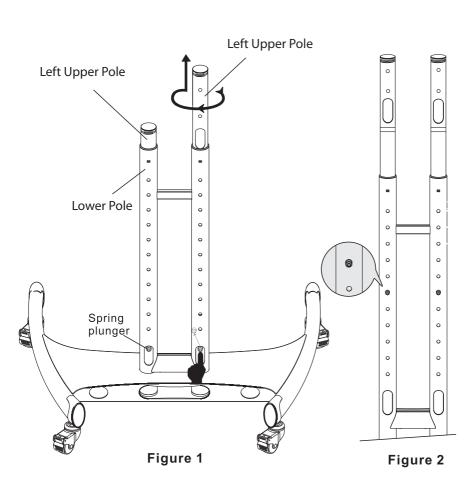


Step 2. Repeat with the left pole.

3. Install the media shelf

Remove Pre-Installed Screws

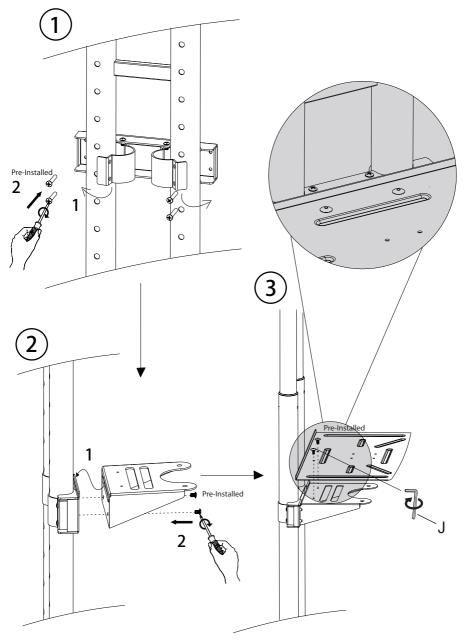


4. Install the TV mount

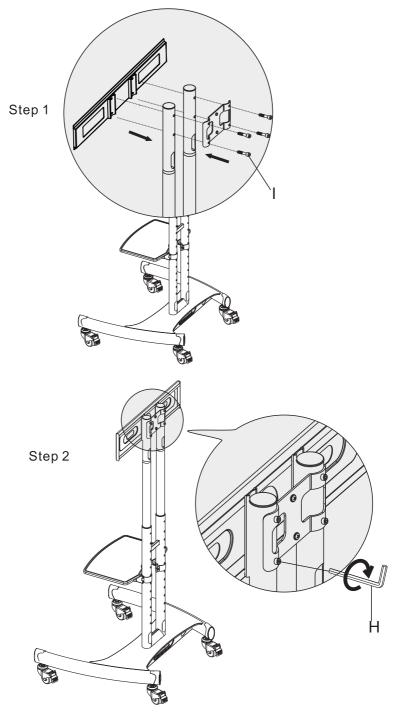


7/10

5. Select your VESA pattern and attach TV brackets

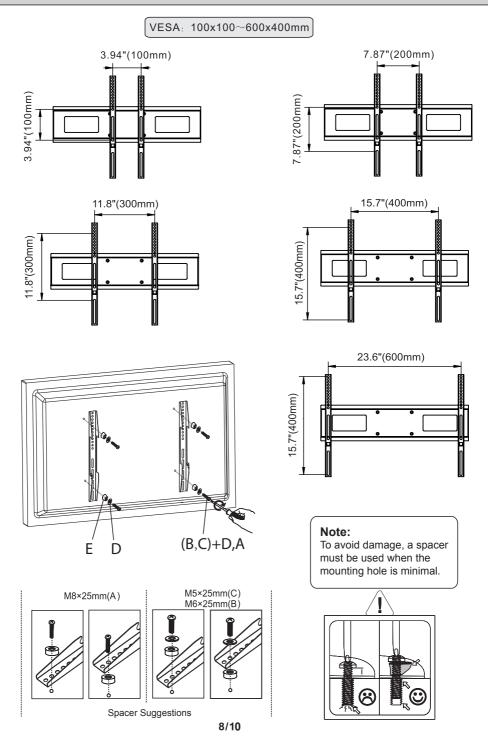

6. Mounting TV to TV mount - Assistance Required!

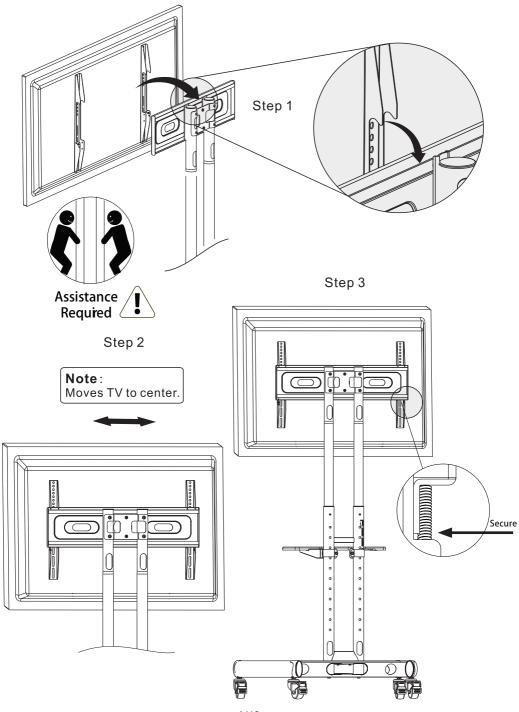

7. Cable Management

